

# LF-1680 MICRO DIGITAL REWORK STATION



**Humanism interface:**  
The angle of control panel is conform to humanism. It's easy to read and set




**Minitype station:**  
Less desktop occupation



**Eligibility fitting combination:**  
Provides many kinds of for the customer selects the disposition, enable the customer to obtain a more reasonable enhancement in the economic efficiency.



**Hi-power heater:**  
Temperature climbs fast, favored by lead free soldering



**Build-up grounding:**  
Can link up ESD wrist strap

## Product Features:

**Password lock:** Convenient for control

**Minitype station:** Less desktop occupation

**°C / °F Select Mode:** May set display °C / °F


**Real-temp modification:** Real temperature can modify Manually

**TWZ/SIA Dual Mode:** Switch the function quickly that you want to select

**Sensor fail notification:** When the sensor failed, "S-E" will Be shown, SIA will power off

**Heater fail notification:** When the heater failed, "H-E" will Be shown, SIA will power off

SIA Heating curve determination:

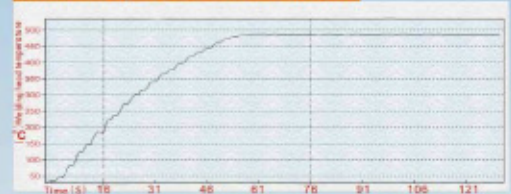

## SPECIFICATION:

<b>Input power</b>	100-120Vac 60Hz	
	220-240Vac 50Hz	
<b>Wattage</b>	SIA	80W
	TWZ	80W
<b>Temperature range</b>	SIA	200-480°C
	TWZ	200-450°C
<b>Standard tip</b>	SIA	44-510601
	TWZ	46-060102



XYTRONIC CO.,LTD  
<http://www.xytronic.com>